

Mono PERC Module

36
Cells
SERIES

- Excellent power output with +ve tolerance
- 10 years limited product warranty
- 25 years of performance warranty*
- All the modules are PID resistant
- 100% EL Tested
- Sustain's heavy wind load 2400 Pa
- Sustain's heavy snow load 5400 Pa

**As per standard warranty terms*



CONSTRUCTIONAL CHARACTERISTICS

- Solar PV modules are constructed with toughened, low iron and textured high light transmission glass with anti-reflective coating (ARC)
- Multi-layer tedlar-based back sheet and ultra fast cure EVA
- 15 micron anodised aluminium frame
- Pre-drilled frame for easy mounting
- IP68 rated junction box

CERTIFICATIONS



IS 14286:2010
IS/IEC 61730 (Part 1): 2004
IS/IEC 61730 (Part 2): 2004



HR Solar Solution (P) Limited

Registered Address : 14 NS Road, Suite no - 102, Kolkata - 700001

Factory Address : Raghudebpur, NH 6, Panchla, Block - Uluberia II, Howrah, West Bengal - 711322

Email: info@hrsolarsolution.com **Website :** www.hrsolarsolution.com **Phone:** +91 33 2243 4540

SPECIFICATIONS:

Electrical Characteristics


Model Name	H75M36
Maximum Power Pmax (Wp)	75WP
Open Circuit Voltage (Voc)	24.91V
Optimum Operating Voltage (Vmp)	21.28V
Optimum Operating Current (Imp)	3.53A
Short Circuit Current (Isc)	3.69A
Fill Factor (%)	81.66%
Module Efficiency (%)	19.11%
Temp Co-eff for Voc / °C (B)	-0.28% / °C
Temp Co-eff for Isc / °C (a)	+0.05% / °C
Temp Co-eff for Power / °C (y)	-0.048% / °C
NOCT	45 C ± 2°C
System Voltage (V)	1500V
Fuse rating (A)	10A

Mechanical Characteristics

Weight (Kg)	4.1 Kg
Dimension (mm)	(535 X 765 X 30) mm
Static Load Wind	2400 Pa
Static Load Snow	5400 Pa

*Standard Test Conditions (STC) - 1000 W/m² irradiance, Air Mass 1.5 and 25°C cell temperature.

Module Frame Assembly

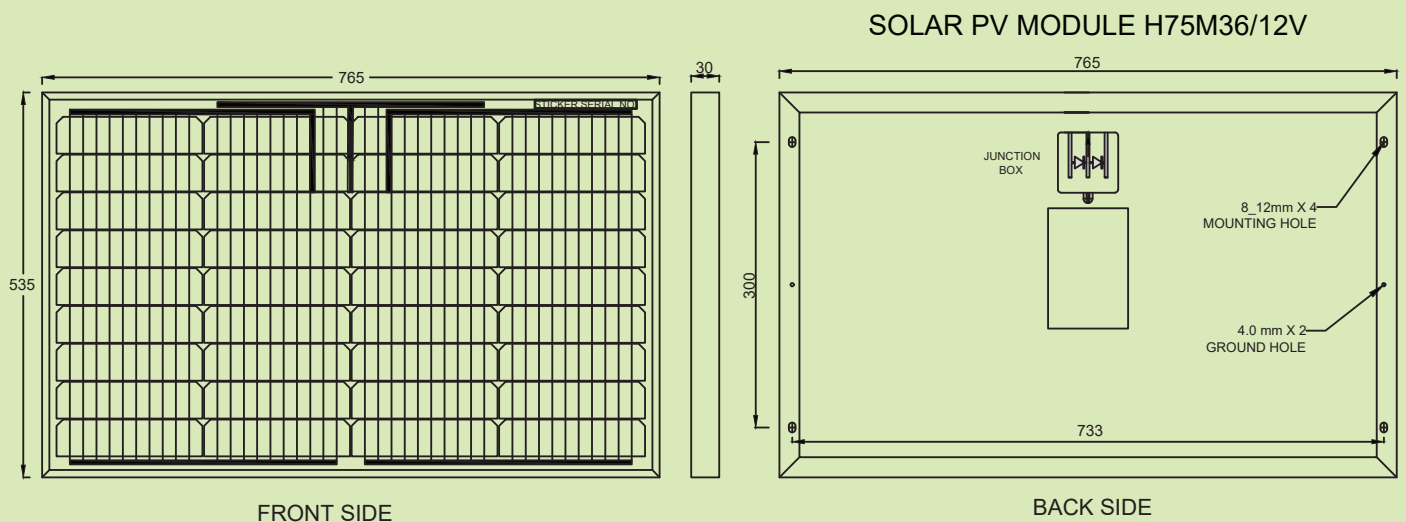

HR Solar Solution (P) Limited

Registered Address : 14 NS Road, Suite no - 102, Kolkata - 700001

Factory Address : Raghudebpur, NH 6, Panchla, Block - Uluberia II, Howrah, West Bengal - 711322

Email: info@hrsolarsolution.com **Website:** www.hrsolarsolution.com **Phone:** +91 33 2243 4540